


SABA-Tool can body calibration crown for FBB

The SABA-Tool can body calibration crown is the results of many years of experience. All FBB calibration crowns are equipped with the analogue read out. This helps to adjust the overlap during production. Furthermore the pre-calibration is equipped with full ceramic rolls. Ceramic hour glass rolls for 11 and 1 o'clock are optionally available.

SABA-Tool calibration crown is available for Ø52-105mm, suitable for FBB400/420, FBB500/540, FBB5501, FBB5502, MKII, FBB5600, FBB5700

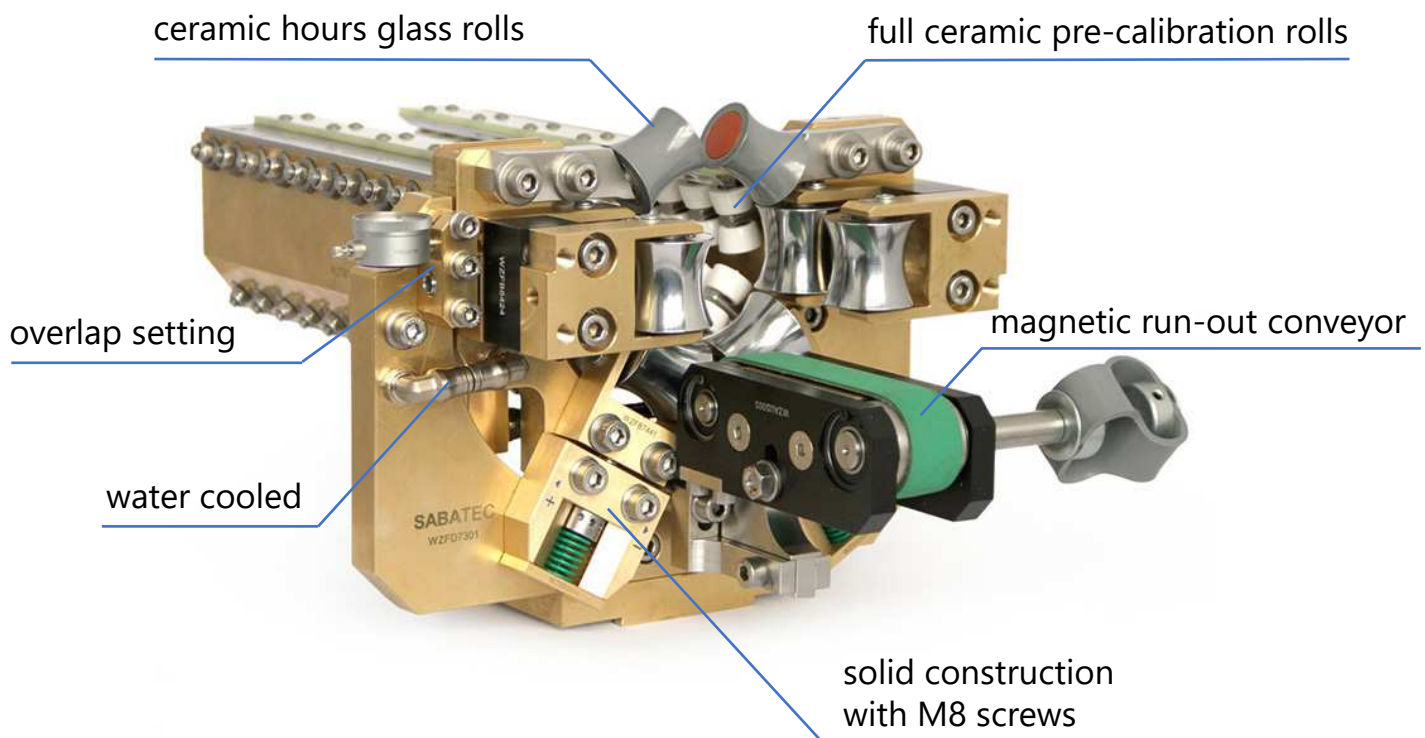


Advantages

- Water cooled calibration crown and pre-calibration
- Easy adjusting of the overlap during the production
- Fully insulated
- Long-life and low wear construction
- Ceramic hour glass rolls (11 and 1 o'clock) available

Roller guide tool for FBB

The SABATEC's roller guide tool offers several advantages compared to the original rod guide tool. It's fully equipped with durable ceramic rolls. This means less friction and therefore less marks on your canbody welder. The roller guide tool is completely insulated.

It is available for Ø52-105mm, suitable for FBB400/420, FBB500/540, FBB5501, FBB5502, MKII.

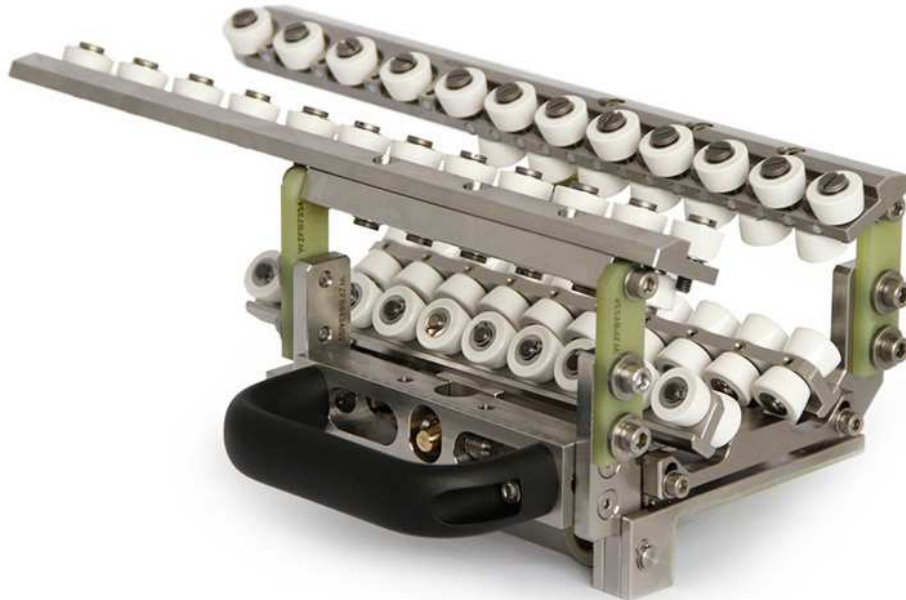

Advantages

- Full ceramic rolls
- No rod guides
- Fully insulated
- Long-life and low wear construction

SABA-Tool can body calibration tool set for FBB

SABA-Tool can body calibration tool set is delivered with setting support, mandrel, run-out conveyor, standard catch shell set, push-in rod, toothed belt wheel to feeder.

